



POSINNO PRO

15" All-in-One POS ,True Flat Projected Capacitive Touch



- Intel® Core i3-3217U CPU
- True Flat Projected Capacitive Technology
- Fanless & Robust Die-Cast Aluminum Housing
- Spill Proof & Anti-Dust
- Detachable Stand / Support VESA Mounting

possibile esempio per inserire nella pagina dei prodotti pc/pos



Model Name		POSINNO PRO
Main Board	Processor	Intel® Core i3-3217U 1.8GHz,Cache 3MB
	Chipset	Intel® HM76
	System Memory	1 x SO-DIMM DDRIII 1600MHz, up to 8GB
Display & Touch	LCD Size	15" TFT LCD(LED backlight)
	Brightness	350nits
	Resolution	1024 x 768
	Touch Technology	True Flat Projected Capacitive Technology
Storage	HDD/SSD	1 x SATA (2.5") HDD or SSD
I/O & Expansion	DC Input	1 x Mini Din 4P (DC 19V only)
	Cash Drawer	1 x RJ-11 (12V or 24V(default))
	LAN port	1 x Gigabit Ethernet by RJ-45
	USB port	4 x USB 2.0 , 2 x USB 3.0 , 2 x USB 2.0 In BACK
	COM port	3 x RS-232(RJ48 connector),COM1/2 Pin10(5V); COM3 Pin10(12V), Power enabled by BIOS setting (default RI)
	VGA port	1 x DB-15 VGA port, Power enabled by BIOS setting (default disable)
	Bus Expansion	1 x Mini-PCI-E Slot
	Power Switch	1 x power on/off switch button
	Speaker	HD Audio, 2W Speaker x 1
OS Support	Windows 10 IOT, Windows 8.1, Windows 7, POSready 7	
Power Adapter	External adapter, DC Model:90 Watts, Voltage:+19VDC 4.74 Amax	
Compliance	Certifications	CE, FCC, LVD, RoHS
VESA Mount	75 mm x 75mm VESA	
Material	Main Unit: Die-Cast Aluminum	
Color	Main Unit: Black	
Dimension(W x H x D)	361.6 x 339.3 x 220	
Weight	6.8Kg	
Environmental	Operating Condition	0°C ~ 35°C, 20% ~ 85% RH, non-condensing
	Storage Condition	-20°C ~ 55°C,20% - 80% RH non-condensing
Accessory	MSR	Front, 3 tracks USB Type
	2nd Display	8" & 10.4" USB Type Resolution 800 x 600

*The right has been reserved to change the specification without prior notice.



◆ Second Display Supported




◆ Quick Assembled USB MSR



◆ Easy Access Peripheral

IO Interface

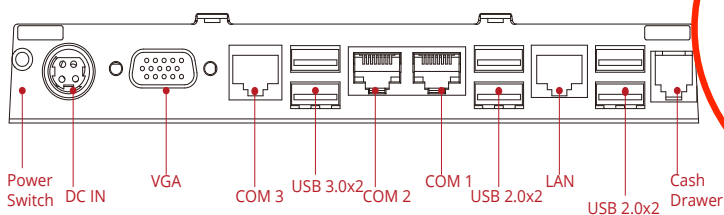

Dimension unit:mm

